## Tes

## T&S BRASS AND BRONZE WORKS, INC.

2 SADDLEBACK COVE / P.O. BOX 1088 / TRAVELERS REST, SC 29690 PHONE 800-476-4103 - FAX 864-834-3518




Sales No.

EW-7611 RELIABILITY BUILT IN

Job Name: Architect/Engineer Approval:

Notes:

SET SCREW CAP 5-5/8" **FLANGE** 143mm RUBBER WASHER SIGN D-NOTCH WASHER 4-7/8 124mm 1-5/841mm MAX. DECK COMPRESSION FITTING SUPPIED **THICKNESS** FOR ½" OD COPPER TUBING (BY OTHERS). LOCKNUT-VALVE SUPPLY SHANK CAN BE POSITIONED IN ONE OF SUPPLY FOUR DIRECTIONS 90° SHANK APART BY LOOSENING THE CAP SET SCREW AND ROTATING VALVE

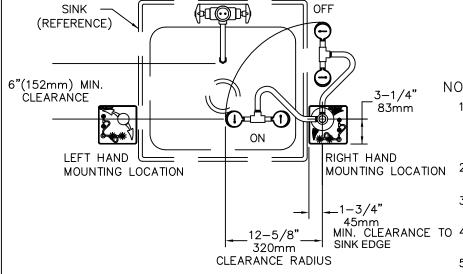

## NOTES:

- 1. THE ANSI STANDARD Z358.1 SPECIFIES EYEWASH NOZZLE HEIGHTS TO BE 33" [838mm] TO 45" [1143mm] ABOVE THE FLOOR.
- MOUNTING LOCATION 2. INSTALL SO THAT EYEWASH HEADS ARE OVER SINK WHEN ACTIVATED.
  - 3. DRILL ONE  $\emptyset1-3/8$ " [35mm] HOLE WHERE UNIT IS TO BE INSTALLED.
- 45mm
  MIN. CLEARANCE TO 4. THESE DIMENSIONS MAY VARY
  SINK EDGE ±1/4" [6.4mm].
  - 5. SEE INSTALLATION INSTRUCTIONS FOR LEFT HAND MOUNTING

Product Description:

SWING AWAY EYEWASH

DECK MOUNTED

Approved

JHB

DECK MOUNTED

Drawn: Checked Scale:

ARH GEF NTS

Approved Date:

12/14/07