EC-3100-HG
Electronic Sensor Faucet with Hydro-Generator

ChekPoint™

EC-3100-HG
Chrome Plated Brass Electronic Faucet, Deck Mount with Rigid Gooseneck and Vandal-Resistant Aerator, AC/DC Control Module with Internal Flow Control Setting Switches, Temperature Control Mixing Valve with Integral Check Valves, Hydro-Generator and 18" long Hot and Cold Supply Stop Flexible Connector Hoses

EC-3100-HG

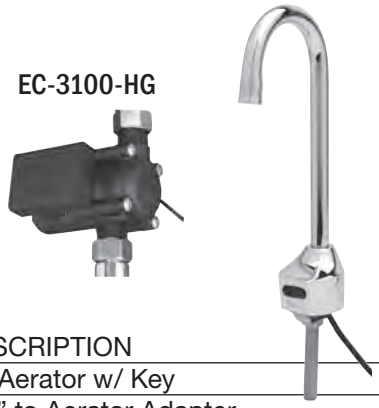

ITEM NO.	SALES NO.	DESCRIPTION
1	B-0199-06	VR Aerator w/ Key
2	044A	3/8" to Aerator Adapter
3	006575-45	-015 O-Ring
4	017195-45	Angled Sensor w/ Cable
5	016297-45	Inlet Hose, Faucet, 1/2" NPSM-F x 1/4" NPSM-F
6	016647-45	ChekPoint Module (Blue)
7	5EF-0002	A/C Transformer
8	5EF-0006	Mechanical Mixing Valve
9	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM
10	015425-45	Vandal Resistant Key
11	EC-HYDROGEN	Hydro-generator & Swivel Coupling
12	017506-45	1/2 NPSM Swivel Coupling

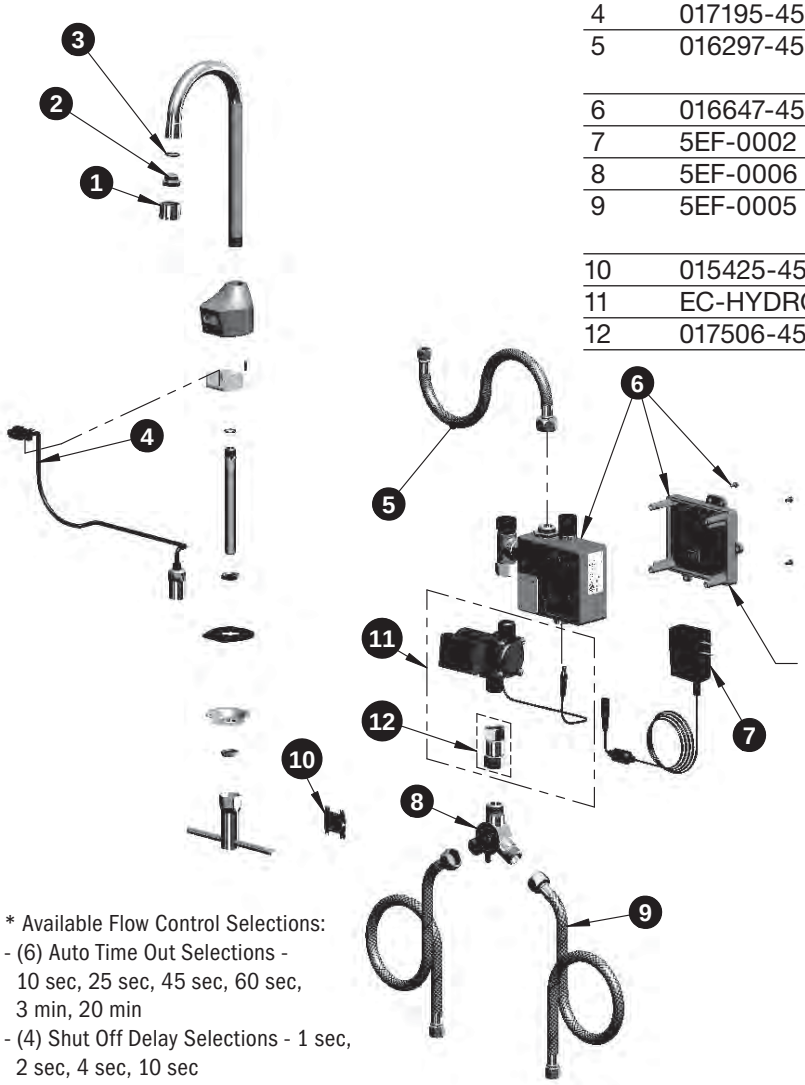

* Available Flow Control Selections:
- (6) Auto Time Out Selections - 10 sec, 25 sec, 45 sec, 60 sec, 3 min, 20 min
- (4) Shut Off Delay Selections - 1 sec, 2 sec, 4 sec, 10 sec
- Auto Flush for 30 Seconds After Every 12 Inactive Hours - ON or OFF

· Label for Flow Control Switch Settings is located on Inside of Back Cover.
· Flow Control Switches are located inside Module Housing in Black Box next to Battery Compartment.

*Switches are set to DEFAULT position:
Auto Time Out = 10 seconds
Shut Off Delay = 1 second
Auto Flush = OFF

· Remove (4) screws and back cover to access switches.